

NOTES:

1. 6" THICK PCC TYPE 560-C-3250 OVER 12" CAB OR CMB @ 95% RELATIVE COMPACTION FOR ALLEY APPROACH.
2. CONSTRUCT RETAINING CURBS AS DIRECTED TO MATCH EXISTING GRADES.
3. PROVIDE 4' MINIMUM WALKWAY PER ADA REQUIREMENTS.
4. PROVIDE FOR DRAINAGE FROM ALLEY.
5. ADJUST TO MATCH EXISTING IMPROVEMENTS.



TYPICAL ALLEY SECTION

APPROVED:


R. Raji
CITY ENGINEER

DATE: 10-15-2013


STD. PLAN NUMBER

113-0

SHEET 1 OF 2

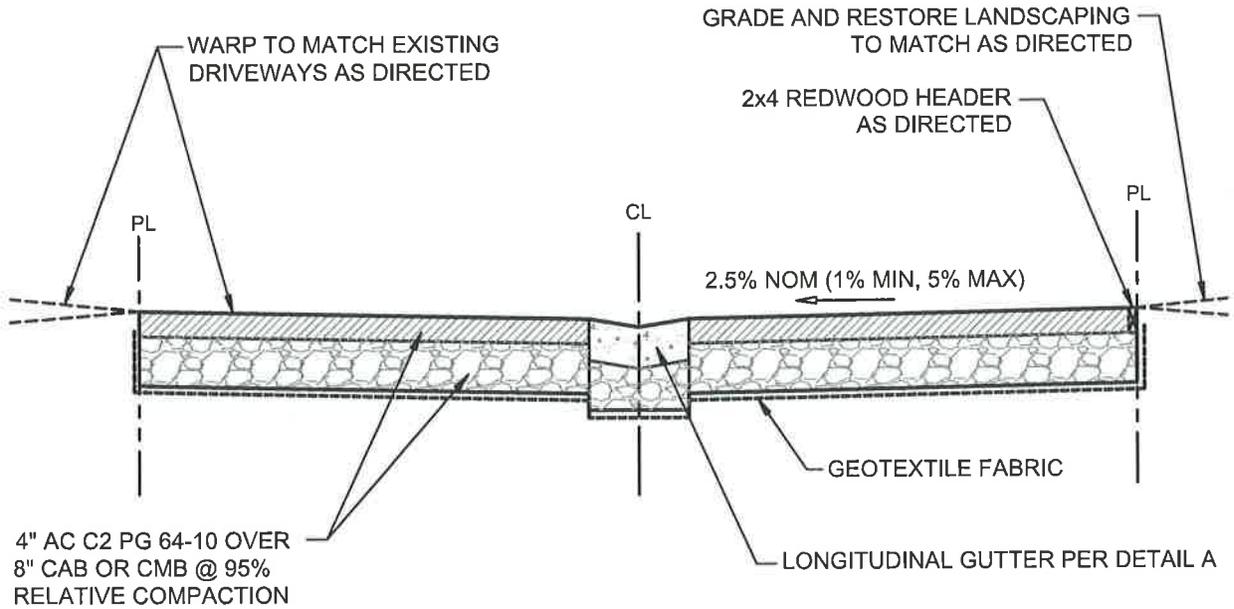

TYPICAL ALLEY SECTION

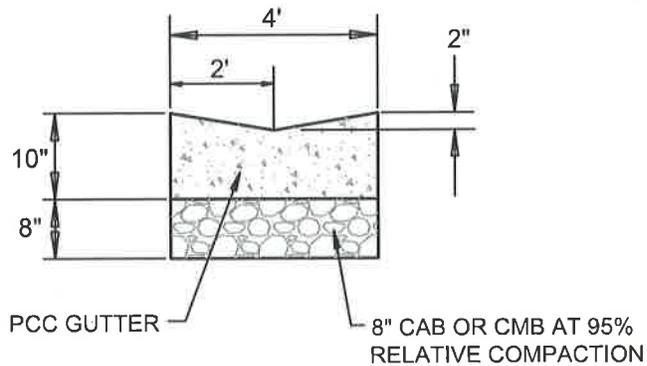

NOTE:
 CONFIGURATION MAY VARY AS DIRECTED BY CITY ENGINEER TO ACCOMMODATE EXISTING IMPROVEMENTS AND PROVIDE POSITIVE DRAINAGE.

DETAIL A



TYPICAL ALLEY SECTION

APPROVED: *[Signature]*
 CITY ENGINEER

DATE: 10-15-2013

STD. PLAN NUMBER
113-0
 SHEET 2 OF 2