

NOTES:

1. NEW STREET NAME SIGNS SHALL BE IN CONFORMANCE WITH MUTCD IN SIZE, READABILITY AND REFLECTIVITY.
2. NEW STREET NAME SIGNS SHALL HAVE THE THEMED HILLS IN THE BACKGROUND MATCHING MONUMENT SIGNS RECENTLY INSTALLED AT SELECTED CITY ENTRANCES.
3. THE NEW SIGNS SHALL HAVE THE NEW STANDARD SHEETING MATERIAL:
 - A. HIP (HIGH INTENSITY PRISMATIC) 3M - TYPE 4 ON 0.125" THICK ALUMINUM.
 - B. BORDER COLOR SHALL BE BLUE WITH WHITE LETTERING ON GREEN BACKGROUND.



STREET NAME SIGNS

APPROVED:

R. Raji
CITY ENGINEER

DATE: 10-15-2013


STD. PLAN NUMBER

506-0


SHEET 1 OF 3




NOTE:
POSTS AND MOUNTING HARDWARE
SHALL BE ZUMAR INDUSTRIES, INC.
OR APPROVED EQUAL.

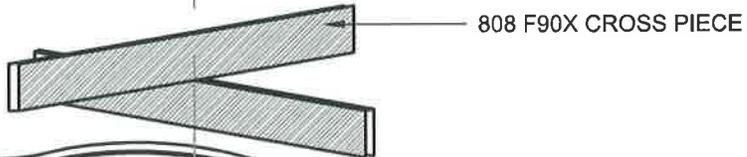

808 F90X CROSS PIECE

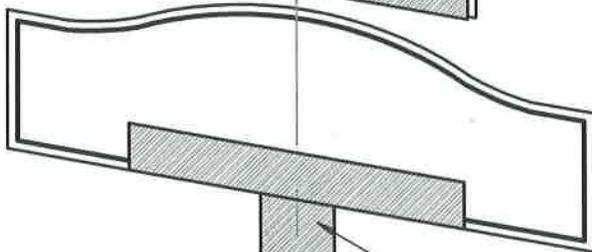


812 F2 SQUARE CAP



2" SQ. GALVANIZED UNI-STRUT POST WITH BASE AND MOUNTING
HARDWARE. INSTALL 2'-6" DEPTH BELOW SIDEWALK. SIGN TO BE 7'
CLEAR ABOVE SIDEWALK.

ASSEMBLY

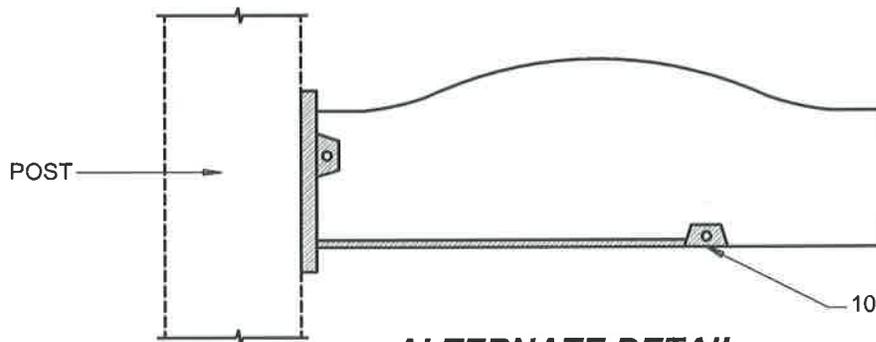

1010 CANTILEVER ARM SUPPORT

ALTERNATE DETAIL

STREET NAME POST AND MOUNTING DETAILS




STREET NAME SIGNS


APPROVED: *[Signature]*
CITY ENGINEER

DATE: 10-15-2013

STD. PLAN NUMBER
506-0
SHEET 2 OF 3

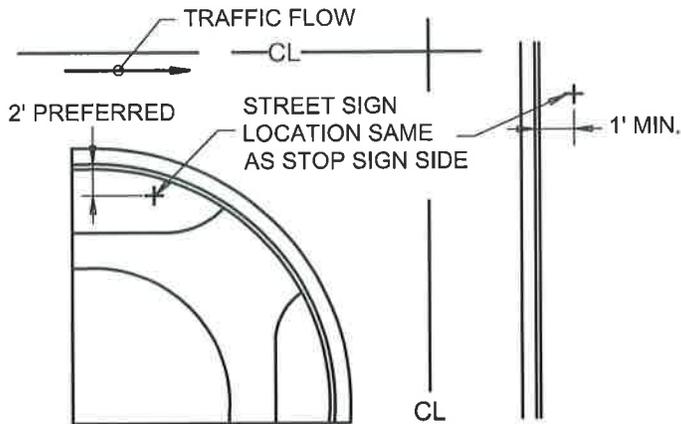

PLAN VIEW
T-INTERSECTION

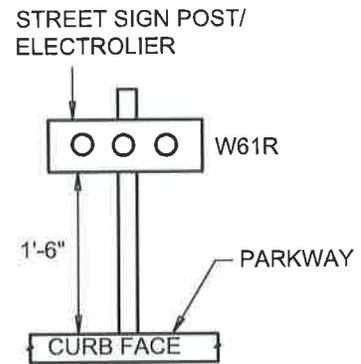

ELEVATION VIEW

NOTES:

1. AT 4 - WAY STREET INTERSECTIONS, TWO (2) STREET NAME SIGNS ARE REQUIRED AND SHALL BE LOCATED ON THE RIGHT APPROACH OF MORE IMPORTANT OF THE STREETS INVOLVED.
2. AT "T" STREET INTERSECTIONS, ONE (1) STREET NAME SIGN IS REQUIRED AND SHALL BE PLACED AS CLOSE AS POSSIBLE ON THE EXTENDED CENTERLINE OF THE "T" INTERSECTION. A W16R HORIZONTAL REFLECTOR UNIT SHALL BE BOLTED, WITH TWO (2) $\frac{1}{4}$ " G.I. BOLTS, TO THE PIPE/ ELECTROLIER (WITH STAINLESS STEEL STRAPPING) 18" CLEAR ABOVE PARKWAY AND FACING THE "T" INTERSECTION.
3. LOCATION SHALL BE SHOWN ON IMPROVEMENT PLANS. A STREET NAME SIGN SCHEDULE SHALL BE SHOWN ON THE ESTIMATE SHEET.
4. NORMALLY, ONE SIGN POST PER INTERSECTION IS SUFFICIENT. FOR THE FOLLOWING CONDITIONS, 2 SIGN POSTS SHALL BE PLACED ON DIAGONALLY OPPOSITE CORNERS SO THAT THEY WILL BE ON THE NEAR RIGHT-HAND SIDE OF THE INTERSECTION FOR TRAFFIC ON THE MORE IMPORTANT STREET:
 - a. IN BUSINESS DISTRICTS.
 - b. INTERSECTIONS OF TWO HIGHWAYS.
 - c. INTERSECTION OF RESIDENTIAL COLLECTOR STREET WITH HIGHWAY.
5. WHERE STREET LIGHT ELECTROLIERS ARE IN THE LOCATION NORMALLY TO BE OCCUPIED BY THE SIGN POST, THE STREET NAME SIGNS SHALL BE MOUNTED ON THE ELECTROLIER WITH STYLE G GALVANIZED "SIDE-ARM" BRACKETS AND STAINLESS STEEL STRAPPING.



STREET NAME SIGNS

APPROVED:

Rexanji
CITY ENGINEER

DATE: 10-15-2013

STD. PLAN NUMBER

506-0

SHEET 3 OF 3