

ANTI-ROTATION
DEVICE, SET AT 0'
(IN-LINE WITH ARM)

6" DIA.

3/8"-16x1" SS HEX
HEAD CAP SCREW

24" NOM.
18"

TOP DETAIL

(4) 1-1/4" DIA. x 1-3/4" LG.
SLOTS


9-7/8" DIA.

14" SQ. x
1" THICK PLATE

15-1/4" B.C.

ARTERIAL STREET

POLE TYPE: AMERON 822-1J3-28(37N)
MODEL: US LIGHTING TECH JERSEY
(MODEL 511-2001-002) INDUCTION
WATTAGE: 200 WATT
SPACING: 150 FEET
CONFIGURATION: STAGGERED

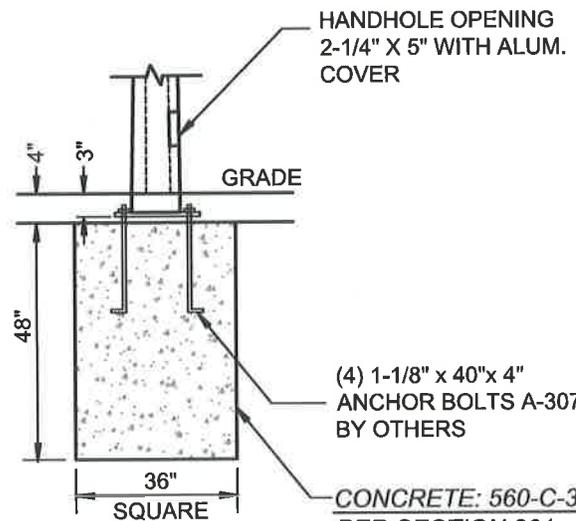

CONCRETE: 560-C-3250
PER SECTION 201
OF STANDARD
SPECIFICATIONS FOR
PUBLIC WORKS
CONSTRUCTON
"GREENBOOK".

BASE DETAIL



ARTERIAL 84' OR GREATER

APPROVED:

R. K. Raji
CITY ENGINEER

DATE: 10-15-2013

STD. PLAN NUMBER

504-0

SHEET 1 OF 1