



ROTOR HEAD, SEE
LEGEND FOR
SPECIFICATION

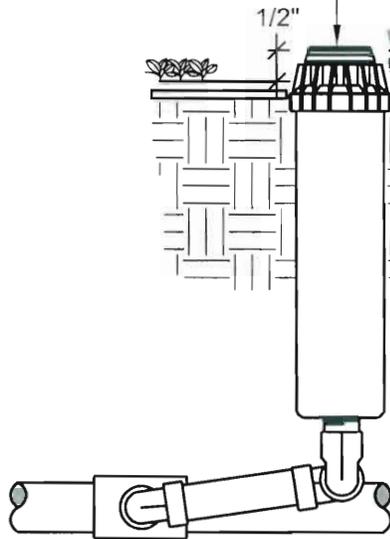

INSTALL SPRINKLER HEAD FLUSH WITH
FINISH GRADE IN TURF AREAS

SPRAY HEAD, SEE LEGEND FOR
SPECIFICATION

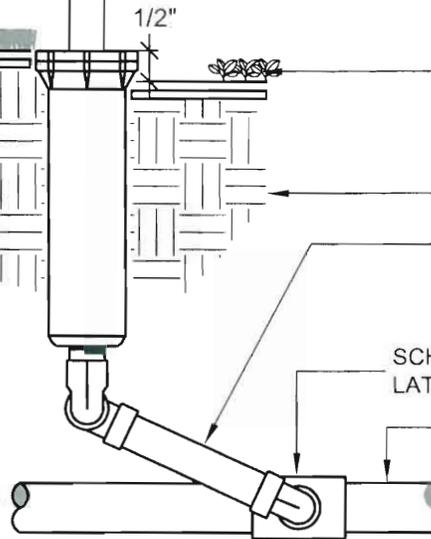

INSTALL SPRINKLER HEAD 1/2"
ABOVE FINISH GRADE IN SHRUB
AND GROUND COVERS AREAS

UNDISTURBED SOIL

TRIPLE SWING JOINT
ASSEMBLY, 8" LAY
MINIMUM., PVC SCH 40

SCH 40 PVC SxSxT TEE FITTING
LATERAL x SPRINKLER INLET SIZE

LATERAL LINE, SEE
SPECIFICATIONS
FOR TYPE AND DEPTH
REQUIRED

NOTES:

1. INSTALL SPRINKLER HEADS 6" FROM PAVING EDGE IN GROUND COVER AREAS.
2. INSTALL SPRINKLER HEADS 4" FROM PAVING EDGE IN TURF AREAS.
3. INSTALL SPRINKLER HEADS PLUMB.
4. ADJUST SPRAYS OR NOZZLE STREAM TO COVER LANDSCAPE AREA WITHOUT OVERSPRAY ONTO PAVING, FENCES, WALLS OR BUILDINGS.
5. DO NOT USE SIDE INLET ON HEADS WITH INTEGRAL CHECK VALVE.
6. ALL THREADED CONNECTIONS TO HAVE TEFLON TAPE OR PASTE.



POP-UP SPRINKLER

APPROVED:

Rexorji
CITY ENGINEER

DATE: 10-15-2013

STD. PLAN NUMBER

603-0

SHEET 1 OF 1