



SECTION-1

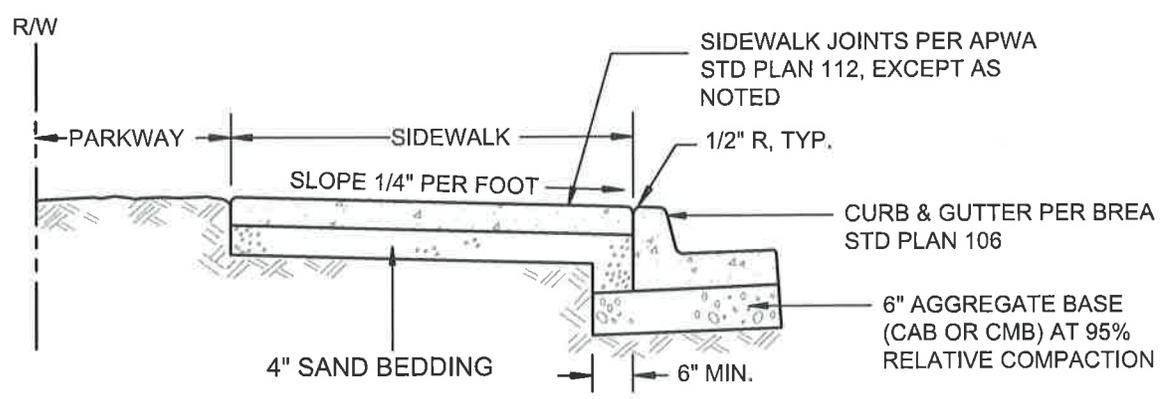

SECTION-2

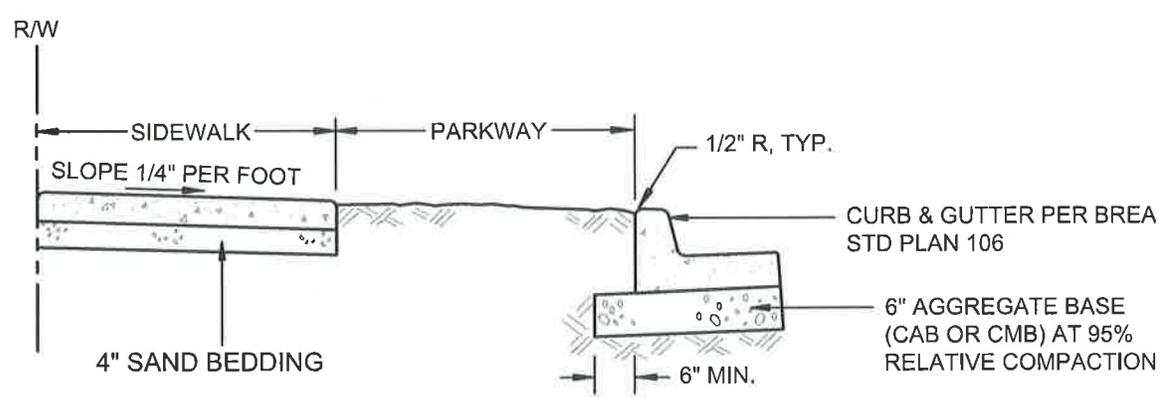

SECTION-3

TYPICAL SECTIONS

NOTES: SEE SHEET-2



APPROVED: *[Signature]*
CITY ENGINEER

SIDEWALK

DATE: 10-15-2013

STD. PLAN NUMBER
103-0
SHEET 1 OF 2

NOTES:

1. WIDTH OF SIDEWALK SHALL BE AS SHOWN ON PLANS OR DIRECTED BY CITY ENGINEER. CONSTRUCT FULL WIDTH SIDEWALK IN COMMERCIAL ZONES, OR WHERE LOTS BACK TO THE STREET.
2. SIDEWALK THICKNESS = 4"
3. 1/4" EXPANSION JOINTS SHALL BE PLACED AT 60' INTERVALS AND AT ENDS OF ALL CURB RETURNS, WEAKENED PLANE JOINTS SHALL BE PLACED AT 20' INTERVALS, OR AS DIRECTED BY CITY ENGINEER.
4. EXPANSION JOINTS, WEAKENED PLANE JOINTS AND SCORING LINES FOR SIDEWALKS SHALL BE PLACED TO COINCIDE WITH JOINTS AND MARKINGS OF THE CURB.
5. CONCRETE SHALL BE PER CITY OF BREA STD PLAN 101.
6. MAKE TRANSVERSE JOINTS AND SCORING RADIAL ON CURVED STREETS.
7. TRANSVERSE "LIGHT BROOM" FINISH FOR LONGITUDINAL GRADES UNDER 10%. TRANSVERSE "HEAVY BROOM" FINISH FOR LONGITUDINAL GRADES OVER 10%.
8. SEE BREA STD PLAN 101 GENERAL NOTES, NOTE NO.4, FOR MONUMENTATION.



CITY OF BREA

SIDEWALK

APPROVED:

R. Raji
CITY ENGINEER

DATE: 10-15-2013

STD. PLAN NUMBER

103-0

SHEET 2 OF 2